


## Poignée RNX en acier inoxydable

Poignée en acier inoxydable 1.4307 (AISI304 L). Surface polie semi-mat. Poignée livrée avec vis et rondelles en inox. Traction maximale applicable supérieure à 1200 N.

## Handle RNX in stainless steel

Handle made of profiled stainless steel 1.4307, surface ground with a half-matt finish, supplied with stainless screws and washers. Stress resistance min. 1000 N.

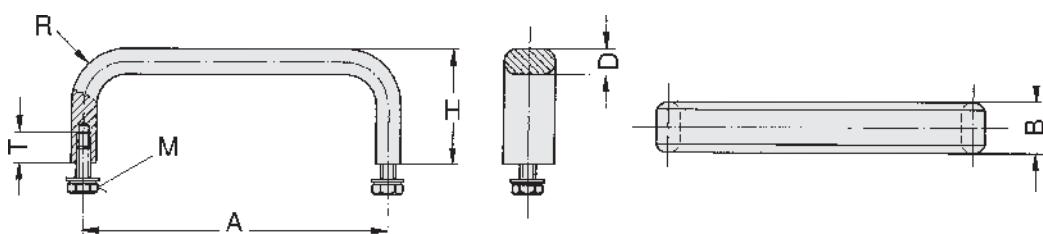

01 Version de largeur 12 mm / width 12 mm

A	B	M	T	H	D	R	REFERENCE
100	12	M5 x 10	10	40	8	22	10401 <i>i</i>
120	12	M5 x 10	10	40	8	22	10402 <i>i</i>
150	12	M5 x 10	10	40	8	22	10403 <i>i</i>
180	12	M5 x 10	10	40	8	22	10404 <i>i</i>
250	12	M5 x 10	10	40	8	22	10405 <i>i</i>
350	12	M5 x 10	10	40	8	22	10406 <i>i</i>

02 Version de largeur 19,5 mm / width 19.5 mm

A	B	M	T	H	D	R	REFERENCE
100	19,5	M6 x 12	12	45	10	24	10407 <i>i</i>
120	19,5	M6 x 12	12	45	10	24	10408 <i>i</i>
150	19,5	M6 x 12	12	45	10	24	10409 <i>i</i>
180	19,5	M6 x 12	12	45	10	24	10410 <i>i</i>
250	19,5	M6 x 12	12	45	10	24	10411 <i>i</i>
350	19,5	M6 x 12	12	45	10	24	10412 <i>i</i>